


PJ Labeler Series

Table Top, Print & Apply and
Automatic Label Application Systems

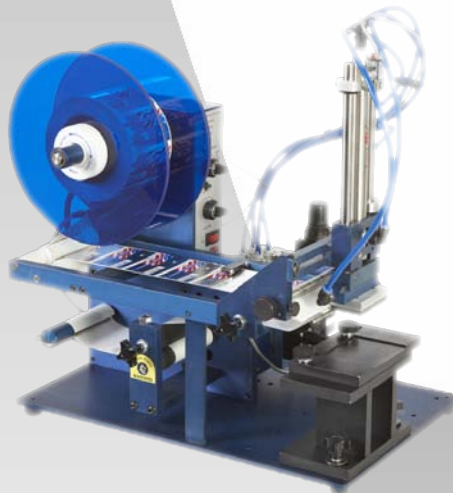

Whatever Your Product ID Needs Are...
...PrintJet Has The Perfect Solution!

PrintJet
THE PRODUCT ID COMPANY

PJ-450 Table Top System




450 Table Top System with Tamp Module.

- Economical to use
- Easy Set Up
- Modular Design
- Microprocessor Control
- Label Dispenser (opt)
- Tamp Applicator
- Flag Applicator (opt)
- Round Product Applicator (opt)
- Hand-Held Label Interface
- Photo Electric Web Sensor



450 Table Top System with Round Product Applicator Module.

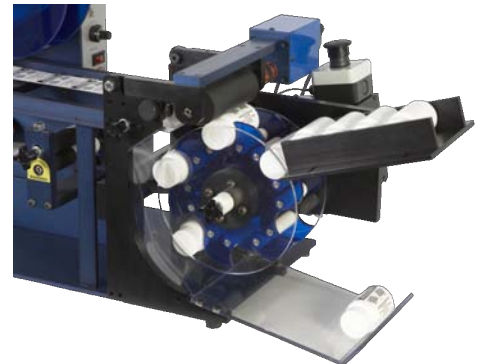

Specifications

Speed/Rate	Up to 45 per min.
Label Placement	+ or - 1/32"
Roll Capacity	9" maximum outside diameter wound on 3" inside diameter core
Label Size	1/4" X 1/2" minimum 4 1/4" X 8" maximum
Application Method	Tamp (Std), Flag, Round Product
Environment	50-95° F, 10-35° C, 15-85% relative humidity non condensing
Air Requirements	80 PSI
General Dimensions	12" W X 18" D X 17" H
Weight	42 lbs. / 20 kgs.
Electrical	115 VAC 250 W Idle, 600 W Running
Options	6" Wide Label , 12" Long Label, Tapered Rollers, Imprinter, 12" Diameter Rolled, Label Storage, Custom Fixtures available.



Tamp Module: For fast and easy changeover



Flag Label: cable, rod, hand tools or any other product quickly and easily




Round Product: To provide partial or full wrap on cylindrical products

PJ-600 Print & Apply Labeling System



- 9 Key Touch Pad
- Large 2 Line Display w/Backlight
- User Friendly Operating Software
- Printer Status Outputs
- Heavy Duty Industrial Design
- Hand-Held Interface
- Left and Right Hand Models

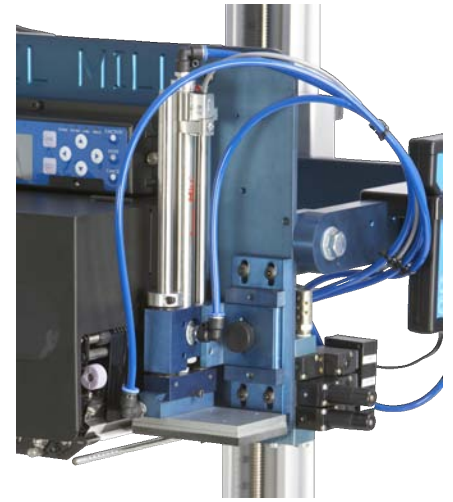

600 Printer Applicator with Tamp Module



Specifications

Speed/Rate	Up to 60 per min.
Roll Capacity	12" maximum outside diameter wound on 3" inside diameter core
Label Size	1" X 1/2" minimum 4" X 14" maximum
Application Method	Tamp (Std), Wipe-On, Blow, Corner Wrap Adjacent Panel
Environment	50-95° F, 10-35° C, 15-85% relative humidity non condensing
Air Requirements	80 PSI
General Dimensions	32" W X 24" D X 24" H
Weight	60 lbs. / 27 kgs.
Electrical	115 VAC - 60 HZ - 6 amps.
Options	Right or Left Hand Models.



Tamp Module: For fast and easy changeover



Blow On: Swing away blow box for ease of webbing and maintenance



Corner Wrap: Heavy duty rotary actuator. Compliant tamp pad




Adjacent Panel: Heavy duty rotary actuator. Compliant tamp pad

PJ-1400 Automatic Label Application System



- Easy Set Up
- Speeds Up To 1400 Per Minute
- Microprocessor Controlled
- Heavy Duty DC Drive
- Dynamic Motor Control
- Hand-Held Label Interface
- Left and Right Models

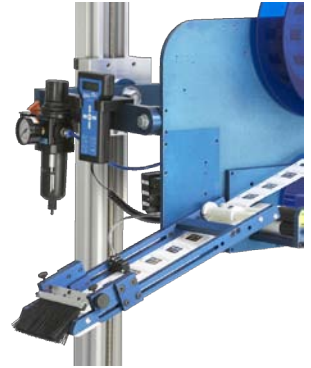

1400 Automatic Label Applicator with Wipe On Module.



Wipe-On: High speed and flexible applications



Tamp Module: For fast and easy changeover



Blow On: Swing away blow box for ease of webbing and maintenance

Specifications

Speed/Rate	1400" per min.
Label Placement	+ or - 1/8"
Roll Capacity	12" maximum outside diameter wound on 3" inside diameter core
Label Size	1/2" X 1/2" minimum 6 1/2" X 12" maximum
Application Method	Blow (Std), Tamp, Flag, Wipe-On, Corner Wrap, Swing Tamp
Environment ity	50-95° F, 10-35° C, 15-85% relative humid- non condensing
Air Requirements	80 PSI
General Dimensions	25" W X 22" D X 21" H
Weight	60 lbs. / 27 kgs.
Electrical	115 VAC - 60 HZ - 6 amps.
Options	Right or Left Hand Models, Custom Systems.



Corner Wrap: Heavy duty rotary actuator. Compliant tamp pad



Adjacent Panel: Heavy duty rotary actuator. Compliant tamp pad

PrintJet
THE PRODUCT ID COMPANY

2421 North Court St.
Rockford, IL 61103
PH 815-877-7511
Fax 815-877-7621

www.printjet.net